

Double Check Vapor Equalizing Valves for ASME and DOT Containers 7573 Series and 3183AC

Application

Designed to facilitate loading operations by providing equalization of pressures in the supply and storage containers. The supplementary excess flow valve closes when the flow from the container being filled exceeds a predetermined rate.

The 7573 Series is designed for use in bulk delivery systems and motor fuel containers. The 3183AC is designed for use in delivery trucks and other large containers.

Features

- Double check provides added system protection.
- Specify RegO Vapor Equalizing Valves on all your original tank purchases to ensure quality and dependable performance.

Materials


Body Brass
 Spring Stainless Steel
 Upper Check Seat + ACME Synthetic Rubber
 Body Gasket Copper
 Cap Plastic

Ordering Information

Part Number		A.	B.	C.	D.	Approx. Closing Flow at 100 PSIG Inlet Pressure (SCFH/Propane)
Basic	W/ Chain & Cap	ACME Hose Connection	Tank Connection M. NPT	Wrench Hex Flats	Effective Length (Approx.)	
7573D	7573DC	1¼"	¾"	1½"	1½"	4,100
-	3183AC	1¼"	1¼"	2"	2¾"	10,000



7573 Series

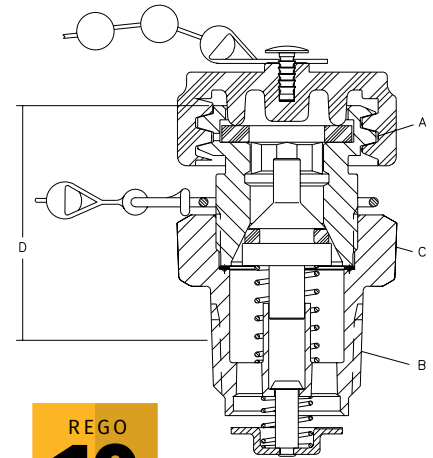

Single Check Vapor Equalizing Valves for ASME and DOT Containers with Supplementary Excess Flow Valves

Application

Designed for use with RegO Excess Flow Valves to facilitate loading operations by providing equalization of pressures in the supply and storage containers. Also may be used as a spare or replacement part. These vapor equalizing valves must never be installed directly into container couplings. They must be used with the appropriate excess flow valve to comply with NFPA Pamphlet #58.

Features

- Specifically for use with RegO Excess Flow Valves.
- Specify RegO Vapor Equalizing Valves on all your original tank purchases to ensure quality and dependable performance.

Materials

Body Brass
 Spring Stainless Steel
 Seat Disc Synthetic Rubber
 Seal Synthetic Rubber
 Cap Plastic

Ordering Information

Part Number		A.	B.	C.	D.	Approximate Closing Flow at 100 PSIG Inlet Pressure (SCFH/Propane Vapor)	For Use With Excess Flow Valve:
Basic	With Cap & Chain	ACME Connection	Tank Connection M.NPT	Wrench Hex Flats	Effective Length (Approx.)		
3170	-	1¼"	¾"	1¼"	1½"	7,600	3272E
-	3180C	1¼"	1¼"	1½"	1½"	10,000	3282A



3170

